



QINGDAO DITRIP TYRE CO.,LTD
Sales Office:
RM 2823, BLDG #3, Excellence Century Center, No.31
Longcheng Road,Qingdao, China
Tel: +86-532-85861980
Site: <http://www.ditriptyre.com>
E-mail: info@ditriptyre.com



www.ditriptyre.com

Passenger and light truck tyres

Catalog 2023 **HP/UHP/SUV/LT/WINTER TYRE/ST**



ABOUT US

Qingdao Ditrip Tyre Co., Ltd, founded in 2012, is a company dedicated to R&D and sales of tires. We have been offering great service to 500+ tire distributors from over 100 countries and we have signed exclusivity agreements with clients from over 20 countries. We have our private brands and at the same time, we are authorized representative of brands of several well-known tire manufacturers.

Our private brand NEREUS covers tires for various applications including passenger cars, buses, trucks, off-road vehicles, industrial vehicles, and agricultural machineries. With over 500 specifications, NEREUS brand car tire has full line of sizes and patterns including HP/UHP/HT/AT/MT/VAN/ST and can meet the needs of various models of cars.

ARIETIS is our new private brand with a focus on off road tires-AT/MT/RT. ARIETIS is a very open brand. The addition of new patterns, sizes and constructions will be according to the special need of clients. ARIETIS will be a promising excellent brand serving certain group of clients.

We have our independent R&D and design team. We have our independent patented technology and independent intellectual property rights. In the past ten years, we have continuously collected customer needs to introduce products suitable to needs of clients and market. We successfully provided high-quality winter tires for electric vehicles for the Nordic client. We specially designed van tires suitable for rough local road conditions for Haiti customer. We introduced summer tires suitable for climate of UK for our UK clients.

We have provided special customized services to meet the needs of clients and we will continue to try our best to provide the special customized to our clients in future.

CONTENTS

01	HP/UHP SAILFISH NS601
05	HP NS316
07	HT DYNTRAC
09	AT NS501
11	MT NS523
13	COMMERCIAL NS913
15	COMMERCIAL NS916
17	SNOW NS805+
19	SNOW SCLAW NS806
21	SNOW SCLAW NS808
23	SNOW SCLAW NS809
25	MINI-CAR NSV53/NSV55
26	ST N-101S

SAILFISH NS601

SPEED RATING

T/H/V Speed Rated

UTQG

320AA / 360AA / 400AA



ADDITIONAL INFORMATION



Dimension Data

SIZE	LI/SI	Measuring Rim	Overall Diameter (mm)	RR	Wet Grip	Noise	UTQG	Remark	EPREL NO.
195/65R14	89H	6.0J	610	C	B	B 69dB	400/A/A		584165
195/70R14	91H	6.0J	630	C	B	B 69dB	400/A/A		584190
205/60R14	88H	6.0J	602	C	B	B 69dB	400/A/A		584197
205/70R14	98H XL	6.0J	644	C	B	B 69dB	400/A/A		584204
215/70R14	96H	6.5J	658	C	B	B 69dB	400/A/A		584207
155/60R15	74T	4.5J	567	D	B	B 69dB	400/A/A		1089117
165/60R15	81H XL	5.0J	579	D	B	B 69dB	400/A/A		1089128
165/65R15	81T	5.0J	595	D	B	B 69dB	400/A/A		1089129
175/55R15	77T	5.5J	573	D	B	B 69dB	360/A/A		584208
175/60R15	81H	5.0J	591	D	B	B 69dB	360/A/A		584226
175/65R15	84H	5.0J	609	C	B	B 69dB	360/A/A		584228
185/55R15	82V	6.0J	585	D	B	B 69dB	400/A/A		584232
185/60R15	88H XL	5.5J	603	C	B	B 69dB	400/A/A		586547
185/65R15	88H	5.5J	621	C	B	B 69dB	400/A/A		586548
195/50R15	82V	6.0J	577	D	B	B 69dB	400/A/A		586550
195/55R15	85V	6.0J	595	C	B	B 69dB	400/A/A		586551
195/60R15	88V	6.0J	615	C	B	B 69dB	400/A/A		586553
195/65R15	91V	6.0J	635	C	B	B 69dB	400/A/A		586555
195/65R15	95T XL	6.0J	635	C	B	B 69dB	400/A/A		623051
205/60R15	91V	6.0J	627	C	B	B 69dB	400/A/A		586556
205/65R15	94V	6.0J	647	C	B	B 69dB	400/A/A		586557
205/70R15	96H	6.0J	669	C	B	B 69dB	320/A/A		586559
215/60R15	94H	6.5J	639	C	B	B 69dB	400/A/A		586560
215/65R15	96H	6.5J	661	C	B	B 69dB	400/A/A		586561
215/70R15	98H	6.5J	683	C	B	B 69dB	400/A/A		586563
225/60R15	96V	6.5J	651	C	B	B 69dB	400/A/A		586566
175/50R16	77V	5.5J	582	D	B	B 69dB	320/A/A		1089130
175/60R16	82H	5.0J	616	D	B	B 69dB	360/A/A		586569
185/50R16	81V	6.0J	592	D	B	B 69dB	320/A/A		1089136
185/55R16	87V XL	6.0J	610	C	B	B 69dB	320/A/A	RP	1089139
195/45R16	84V XL	6.5J	582	C	B	B 69dB	400/A/A	RP	586572
195/50R16	84V	6.0J	602	C	B	B 69dB	400/A/A		586714
195/55ZR16	91W XL	6.0J	620	C	B	B 69dB	400/A/A		586718
195/60R16	89H	6.0J	640	C	B	B 69dB	400/A/A		1089153
205/45ZR16	87W XL	7.0J	590	C	B	B 69dB	320/A/A	RP	592076
205/50ZR16	87W	6.5J	612	C	B	B 69dB	320/A/A	RP	592083
205/55R16	91V	6.5J	632	C	B	B 69dB	320/A/A		592087
205/55ZR16	94W XL	6.5J	632	C	B	B 69dB	320/A/A		592117
205/55ZR16	91W	6.5J	632	C	B	B 69dB	320/A/A		592091

RP=Rim Protector

Dimension Data

SIZE	LI/SI	Measuring Rim	Overall Diameter (mm)	RR	Wet Grip	Noise	UTQG	Remark	EPREL NO.
13 155/65R13	73T	4.5J	532	D	B	B 69dB	400/A/A		1089122
155/70R13	75T	4.5J	548	D	B	B 69dB	360/A/A		578364
155/80R13	79T	4.5J	578	D	B	B 69dB	400/A/A		1089125
165/65R13	77H	5.0B	544	D	B	B 69dB	360/A/A		578373
165/70R13	79T	5.0J	562	D	B	B 69dB	360/A/A		578382
165/80R13	83T	4.5J	594	D	B	B 69dB	360/A/A		578391
175/60R13	77T	5.0J	540	D	B	B 69dB	360/A/A		578320
175/70R13	82T	5.0J	576	D	B	B 69dB	360/A/A		578473
185/70R13	86H	5.5J	590	C	B	B 69dB	360/A/A		583345
14 155/65R14	75T	4.5J	558	D	B	B 69dB	360/A/A		583347
155/70R14	77T	4.5J	574	D	B	B 69dB	360/A/A		583372
165/60R14	75H	5.0J	554	D	B	B 69dB	400/A/A		583404
165/65R14	79T	5.0J	570	D	B	B 69dB	400/A/A		583418
165/70R14	81T	5.0J	588	D	B	B 69dB	360/A/A		583463
175/65R14	82H	5.0J	584	D	B	B 69dB	400/A/A		583515
175/70R14	84H	5.0J	602	C	B	B 69dB	360/A/A		583523
185/50R14	77V	6.0J	542	D	B	B 69dB	400/A/A		1089133
185/55R14	80H	6.0J	560	D	B	B 69dB	400/A/A		583563
185/60R14	82H	5.5J	578	D	B	B 69dB	400/A/A		583566
185/65R14	86H	5.5J	596	C	B	B 69dB	400/A/A		583650
185/70R14	88H	5.5J	616	C	B	B 69dB	400/A/A		583745
195/60R14	86H	6.0J	590	C	B	B 69dB	400/A/A		583754

RP=Rim Protector

SAILFISH NS601

Adopt the advanced asymmetrical tread design, the closed left shoulder design can reduce the noise during the driving, but don't affect the handling.

Continuous center rib designing guarantee the stability in the straight driving.



Four Channel Rib Design for Efficient water evacuation to guarantee the drainage ability during in the raining days and flood water surface, enhance the grip ability on the wet land.

Dimension Data

SIZE	LI/SI	Measuring Rim	Overall Diameter (mm)	RR	Wet Grip	Noise	UTQG	Remark	EPREL NO.
215/40ZR18	89W XL	7.5J	629	C	B	B 69dB	320/A/A	RP	609279 623677
215/45ZR18	93W XL	7.0J	651	C	B	B 69dB	320/A/A	RP	609282 623687
225/35ZR18	87Y XL	8.0J	615	C	B	B 69dB	320/A/A	RP	1089157
225/40ZR18	92W XL	8.0J	637	C	B	B 69dB	320/A/A	RP	609287 623729
225/45ZR18	95W XL	7.5J	659	C	B	B 69dB	320/A/A	RP	609338 623793
235/40ZR18	95W XL	8.5J	645	C	B	B 69dB	320/A/A	RP	609347 623880
235/45ZR18	98W XL	8.0J	669	C	B	B 69dB	320/A/A	RP	609353 623893
235/50ZR18	101W XL	7.5J	693	C	B	B 69dB	320/A/A	RP	609248
235/55R18	104V XL	7.5J	715	C	B	B 69dB	320/A/A	RP	609262
245/35ZR18	92Y XL	8.5J	629	C	B	B 69dB	320/A/A	RP	1089171
245/40ZR18	97W XL	8.5J	653	C	B	B 69dB	320/A/A	RP	609358 623914
245/45ZR18	100W XL	8.0J	677	C	B	B 69dB	320/A/A	RP	609419 623916
245/50ZR18	104W XL	7.5J	703	C	B	B 69dB	320/A/A	RP	609426
255/35ZR18	94W XL	9.0J	635	C	B	B 73dB	320/A/A	RP	609435 623945
255/40ZR18	99Y XL	9.0J	661	C	B	B 73dB	320/A/A	RP	1089188
255/45ZR18	103W XL	8.5J	687	C	B	B 73dB	320/A/A	RP	609444 623065
255/55ZR18	109W XL	8.0J	737	C	B	B 73dB	320/A/A	RP	609911 623967
265/35ZR18	97Y XL	9.5J	643	C	B	B 73dB	320/A/A	RP	1089196
275/35ZR18	99Y XL	9.5J	649	C	B	B 73dB	320/A/A	RP	1089202
19215/35ZR19	85Y XL	7.5J	633	C	B	B 69dB	320/A/A	RP	1089154
225/35ZR19	88W XL	8.0J	641	C	B	B 69dB	320/A/A	RP	620247 623726
225/40ZR19	93Y XL	8.0J	663	C	B	B 69dB	320/A/A	RP	1089164
225/45ZR19	96Y XL	7.5J	685	C	B	B 69dB	320/A/A	RP	1089167
235/35ZR19	91W XL	8.5J	647	C	B	B 69dB	320/A/A	RP	620267 623820
235/40ZR19	96W XL	8.5J	671	C	B	B 69dB	320/A/A	RP	609928 623885
245/35ZR19	93W XL	8.5J	655	C	B	B 69dB	320/A/A	RP	621056 623895
245/40ZR19	98Y XL	8.5J	679	C	B	B 69dB	320/A/A	RP	1089176
245/45ZR19	102W XL	8.0J	703	C	B	B 69dB	320/A/A	RP	621063 623922
255/30ZR19	91W XL	9.0J	637	C	B	B 73dB	320/A/A	RP	621070 623935
255/35ZR19	96W XL	9.0J	661	C	B	B 73dB	320/A/A	RP	621077 623951
255/40ZR19	100W XL	9.0J	687	C	B	B 73dB	320/A/A	RP	621707 623956
255/45ZR19	104Y XL	8.5J	713	C	B	B 73dB	320/A/A	RP	1089189
265/30ZR19	93Y XL	9.5J	643	C	B	B 73dB	320/A/A	RP	1089194
275/30ZR19	96Y XL	9.5J	649	C	B	B 73dB	320/A/A	RP	1089199
275/35ZR19	100Y XL	9.5J	675	C	B	B 73dB	320/A/A	RP	1089203
275/40ZR19	105Y XL	9.5J	703	C	B	B 73dB	320/A/A	RP	1089207
275/45ZR19	108Y XL	9.0J	731	C	B	B 73dB	320/A/A	RP	1089208
20225/35ZR20	90W XL	8.0J	666	C	B	B 69dB	320/A/A	RP	1089162
235/30ZR20	88Y XL	8.5J	650	C	B	B 69dB	320/A/A	RP	1089168
245/30ZR20	90Y XL	8.5J	656	C	B	B 69dB	320/A/A	RP	1089169
245/35ZR20	95W XL	8.5J	680	C	B	B 69dB	320/A/A	RP	621708 623633
245/40ZR20	99Y XL	8.5J	704	C	B	B 69dB	320/A/A	RP	1089182
255/30ZR20	92W XL	9.0J	662	C	B	B 73dB	320/A/A	RP	623641 623939
255/35ZR20	97Y XL	9.0J	686	C	B	B 73dB	320/A/A	RP	1089185
275/30ZR20	97Y XL	9.5J	674	C	B	B 73dB	320/A/A	RP	1089200
275/35ZR20	102W XL	9.5J	700	C	B	B 73dB	320/A/A	RP	623652 623973
22295/40ZR22	112W XL	10.5J	795	C	B	B 75dB	320/A/A	RP	623662 623979

RP=Rim Protector

Dimension Data

SIZE	LI/SI	Measuring Rim	Overall Diameter (mm)	RR	Wet Grip	Noise	UTQG	Remark	EPREL NO.
205/60R16	92V	6.0J	652	C	B	B 69dB	400/A/A		597627
205/65R16	95H	6.0J	672	C	B	B 69dB	320/A/A		597634
215/55ZR16	97W XL	7.0J	642	C	B	B 69dB	320/A/A		597645
215/60R16	95V	6.5J	664	C	B	B 69dB	400/A/A		597666
215/65R16	98H	6.5J	686	C	B	B 69dB	320/A/A		597669
225/60R16	98H	6.5J	676	C	B	B 69dB	400/A/A		597710
235/60R16	100H	7.0J	688	C	B	B 69dB	400/A/A		597744
225/50ZR16	96W XL	7.0J	632	C	B	B 69dB	320/A/A	RP	597690
225/55ZR16	99W XL	7.0J	654	C	B	B 69dB	320/A/A	RP	597699
17195/40ZR17	81W XL	7.0J	588	D	B	B 69dB	320/A/A	RP	1089145
195/45ZR17	85W XL	6.5J	608	C	B	B 69dB	320/A/A	RP	1089148
205/40ZR17	84W XL	7.5J	596	C	B	B 69dB	320/A/A	RP	597759
205/45ZR17	88W XL	7.0J	616	C	B	B 69dB	320/A/A	RP	597764
205/50ZR17	93W XL	6.5J	638	C	B	B 69dB	320/A/A	RP	597847
205/55ZR17	95W XL	6.5J	658	C	B	B 69dB	320/A/A	RP	597757
215/40ZR17	87W XL	7.5J	604	C	B	B 69dB	320/A/A	RP	597858
215/45ZR17	91W XL	7.0J	626	C	B	B 69dB	320/A/A	RP	597861
215/50ZR17	95W XL	7.0J	648	C	B	B 69dB	320/A/A	RP	597866
215/55ZR17	98W XL	7.0J	668	C	B	B 69dB	320/A/A	RP	597872
225/45ZR17	94W XL	7.5J	634	C	B	B 69dB	320/A/A	RP	609031 623786
225/50ZR17	98W XL	7.0J	658	C	B	B 69dB	320/A/A	RP	609061 623799
225/55ZR17	101W XL	7.0J	680	C	B	B 69dB	320/A/A	RP	609077
235/45ZR17	97W XL	8.0J	644	C	B	B 69dB	320/A/A	RP	609164 623888
235/50ZR17	100W XL	7.5J	668	C	B	B 69dB	320/A/A	RP	609207
235/55ZR17	103V XL	7.5J	690	C	B	B 69dB	320/A/A	RP	609223
245/40ZR17	95W XL	8.5J	628	C	B	B 69dB	320/A/A	RP	609233 623907
245/45ZR17	99W XL	8.0J	652	C	B	B 69dB	320/A/A	RP	609243
18215/35ZR18	84W XL	7.5J	607	C	B	B 69dB	320/A/A	RP	609273

RP=Rim Protector



NS316

SPEED RATING
T/H/V Speed Rated

UTQG
400AA

ADDITIONAL INFORMATION

E9

CCC

NOM

M+S

NOISE

COMFORT

DRAINAGE

BRAKING

ECONOMY

Dimension Data

	SIZE	LI/SI	Measuring Rim	Overall Diameter (mm)	UTQG	Remark
13	155/65R13	73T	4.5J	532	400/A/A	
	155/70R13	75T	4.5J	548	400/A/A	
	155/80R13	79T	4.5J	578	400/A/A	
	165/65R13	77T	4.5J	544	400/A/A	
	165/70R13	79T	5.0J	562	400/A/A	
	165/80R13	83T	4.5J	594	400/A/A	
	175/60R13	77T	5.0J	540	400/A/A	
	175/70R13	82T	5.0J	576	400/A/A	
14	185/70R13	86H	5.5J	590	400/A/A	
	155/65R14	75T	4.5J	558	400/A/A	
	165/60R14	75H	5.0J	554	400/A/A	
	165/70R14	81T	5.0J	588	400/A/A	
	175/65R14	82H	5.0J	584	400/A/A	

RWW= Raised White Wall RWL= Raised White Letter RP= Rim Protector

Dimension Data

	SIZE	LI/SI	Measuring Rim	Overall Diameter (mm)	UTQG	Remark
15	175/70R14	84T	5.0J	602	400/A/A	
	185/60R14	82H	5.5J	578	400/A/A	
	185/65R14	86H	5.5J	596	400/A/A	
	185/70R14	88H	5.5J	616	400/A/A	
	195/60R14	86H	6.0J	590	400/A/A	
	195/65R14	89H	6.0J	610	400/A/A	
	195/70R14	91H	6.0J	630	400/A/A	
	205/60R14	88H	6.0J	602	400/A/A	
	205/70R14	95H	6.0J	644	400/A/A	
	215/70R14	96H	6.5J	658	400/A/A	
	175/65R15	84H	5.0J	609	400/A/A	RP
	185/55R15	82V	6.0J	585	400/A/A	RP
	185/60R15	88H XL	5.5J	603	400/A/A	
	185/65R15	88H	5.5J	621	400/A/A	
	195/50R15	82V	6.0J	577	400/A/A	RP
16	195/55R15	85V	6.0J	595	400/A/A	RP
	195/60R15	88H	6.0J	615	400/A/A	
	195/65R15	91H	6.0J	635	400/A/A	
	205/60R15	91H	6.0J	627	400/A/A	
	205/65R15	94H	6.0J	647	400/A/A	
	205/70R15	96H	6.0J	669	400/A/A	
	215/60R15	94H	6.5J	639	400/A/A	
	215/65R15	96H	6.5J	661	400/A/A	
	215/70R15	98H	6.5J	683	400/A/A	
	225/60R15	96V	6.5J	651	400/A/A	
	195/50R16	84V	6.0J	602	400/A/A	
	195/55R16	91V XL	6.0J	620	400/A/A	
	195/60R16	89H	6.0J	640	400/A/A	
	205/55R16	94V XL	6.5J	632	400/A/A	RP
	205/60R16	92H	6.0J	652	400/A/A	
17	205/65R16	95H	6.0J	672	400/A/A	
	215/55R16	97W	7.0J	642	400/A/A	
	215/60R16	95H	6.5J	664	400/A/A	
	215/65R16	98H	6.5J	686	400/A/A	
	225/55R16	95V	7.0J	654	400/A/A	
	225/60R16	98H	6.5J	676	400/A/A	
	235/60R16	100H	7.0J	688	400/A/A	
	215/55R17	94V	7.0J	668	400/A/A	
	225/55R17	101H XL	7.0J	680	400/A/A	
	165/65R13	77T	4.5J	544	400/A/A	RWW
	175/70R13	82T	5.0J	576	400/A/A	RWW
	185/70R14	88H	5.5J	616	400/A/A	RWW
	185/70R14	88H	5.5J	616	400/A/A	RWL
	195/70R14	91H	6.0J	630	400/A/A	RWW
	195/70R14	91H	6.0J	630	400/A/A	RWL
RWW RWL	195/65R15	91H	6.0J	635	400/A/A	RWW
	195/65R15	91H	6.0J	635	400/A/A	RWL

RWW= Raised White Wall RWL= Raised White Letter RP= Rim Protector

DYNTRAC

REACH

COMPLIANCE

SPEED RATING
H/V Speed Rated

UTQG
500AA

ADDITIONAL INFORMATION

GRAND PRIX

E9

CCC

NOM

NOISE

COMFORT

DRAINAGE

BRAKING

ECONOMY

HANDLING

M+S



Dimension Data

	SIZE	LI/SI	Measuring Rim	Overall Diameter (mm)	RR	Wet Grip	Noise	UTQG	EPREL NO.
16	215/65R16	98H	6.5J	686	C	C	B 71dB	500/A/A	623983
	215/70R16	100H	6.5J	708	C	C	B 71dB	500/A/A	623988
	225/70R16	103H	6.5J	722	C	C	B 71dB	500/A/A	623991
	235/70R16	106H	7.0J	736	C	C	B 71dB	500/A/A	623998
	245/70R16	111H XL	7.0J	750	C	C	B 72dB	500/A/A	624001
17	265/70R16	112H	8.0J	778	C	C	B 72dB	500/A/A	624005
	215/60R17	96V	6.5J	690	C	C	B 71dB	500/A/A	624011
	225/60R17	99H	6.5J	702	C	C	B 71dB	500/A/A	624018
	225/65R17	102H	6.5J	724	C	C	B 71dB	500/A/A	624023
	235/55R17	103V XL	7.5J	690	C	C	B 72dB	500/A/A	624592
	235/60R17	102H	7.0J	714	C	C	B 71dB	500/A/A	624588
	235/65R17	108H XL	7.0J	738	C	C	B 72dB	500/A/A	624597
	245/65R17	111H XL	7.0J	750	C	C	B 72dB	500/A/A	624602
	265/65R17	112H	8.0J	776	C	C	B 72dB	500/A/A	624605
	215/55R18	95V	7.0J	693	C	C	B 71dB	500/A/A	624612
18	225/50R18	95W	7.0J	683	C	C	B 71dB	500/A/A	1335322
	225/55R18	98V	7.0J	705	C	C	B 71dB	500/A/A	1335326
	225/60R18	100H	6.5J	727	C	C	B 71dB	500/A/A	1335328
	235/50R18	101V XL	7.5J	693	C	C	B 72dB	500/A/A	624619
	235/55R18	104V XL	7.5J	715	C	C	B 72dB	500/A/A	624625
	235/60R18	107V XL	7.0J	739	C	C	B 72dB	500/A/A	624628
	235/65R18	106H	7.0J	763	C	C	B 71dB	500/A/A	1335330
	245/60R18	105V	7.0J	751	C	C	B 71dB	500/A/A	1335334
	255/55R18	109V XL	8.0J	737	C	C	B 72dB	500/A/A	624635
	285/60R18	120H XL	8.5J	799	C	C	B 73dB	500/A/A	624677
19	225/55R19	99V	7.0J	731	C	C	B 71dB	500/A/A	1335335
	235/50R19	99V	7.5J	719	C	C	B 71dB	500/A/A	1335337
	235/55R19	105V XL	7.5J	741	C	C	B 72dB	500/A/A	1335338
	245/55R19	103V	7.5J	753	C	C	B 71dB	500/A/A	1335339
	255/50R19	107W XL	8.0J	739	C	C	B 72dB	500/A/A	1335340
	255/55R19	111V XL	8.0J	763	C	C	B 72dB	500/A/A	624681
20	245/50R20	102V	7.5J	754	C	C	B 71dB	500/A/A	1335342
	255/50R20	109W XL	8.0J	764	C	C	B 72dB	500/A/A	1335345
	255/55R20	110W XL	8.0J	788	C	C	B 72dB	500/A/A	1335346
	285/50R20	116W XL	9.0J	794	C	C	B 73dB	500/A/A	1335347



NS501

SPEED RATING
S/T Speed Rated
UTQG
480/A/B

ADDITIONAL INFORMATION



M+S



Dimension Data

	SIZE	LI/SI	Ply Rating	Measuring Rim	Overall Diameter (mm)	UTQG	Remark
15	LT215/75R15	106/103S	8PR	6.0J	703		OWL
	235/75R15	109T XL		6.5J	733	480/A/B	OWL
	31×10.5R15LT	109S	6PR	8.5J	775		OWL
16	215/70R16	100T		6.5J	708	480/A/B	OWL
	235/70R16	106T		7.0J	736	480/A/B	OWL

OWL=Outline White Letter

Dimension Data

	SIZE	LI/SI	Ply Rating	Measuring Rim	Overall Diameter (mm)	UTQG	Remark
	245/70R16	107T		7.0J	750	480/A/B	OWL
	265/70R16	112T		8.0J	778	480/A/B	OWL
	LT215/85R16	115/112S	10PR	6.0J	772		OWL
	LT225/75R16	115/112S	10PR	6.0J	744		OWL
	LT235/85R16	120/116S	10PR	6.5J	806		OWL
	LT235/85R16	120/116S	10PR	6.5J	806		OWL
	LT245/75R16	120/116S	10PR	7.0J	774		OWL
	LT265/75R16	123/120S	10PR	7.5J	804		OWL
	LT285/75R16	122/119S	8PR	8.0J	834		OWL
17	225/65R17	102T/H		6.5J	724	480/A/B	OWL
	235/65R17	108T XL		7.0J	738	480/A/B	OWL
	245/65R17	107T		7.0J	750	480/A/B	OWL
	265/65R17	112T		8.0J	776	480/A/B	OWL
	265/70R17	115T		8.0J	804	480/A/B	OWL
	LT265/70R17	121/118 S	10PR	8.0J	804		OWL
	LT285/70R17	121/118 S	8PR	8.5J	832		OWL
18	265/60R18	110T		8.0J	775	480/A/B	OWL
	275/65R18	116T		8.0J	815	480/A/B	OWL
20	265/50R20	111T XL		8.5J	774	480/A/B	OWL
	275/55R20	117T XL		8.5J	810	480/A/B	OWL
	275/60R20	115T		8.0J	838	480/A/B	OWL
	LT275/65R20	126 /123S	10PR	8.0J	866		OWL

OWL=Outline White Letter



Off-road driving excitement.



Wild sidewall pattern design represents the fashion and uniqueness of the tyre.

Wide grooves provide "self-clean"



Big tread pattern design increases the contacting area with the ground, deeper depth provides a better driving performance on rough road condition.

Stepped groove design avoids small stones embedded into tire patterns damaging the tyre, better guarantees the driving stability.

Dimension Data

	SIZE	LI/SI	Tire Type	Measuring Rim	Overall Diameter (mm)
14	27×8.5R14LT	95Q	6PR	7.0J	674
15	LT215/75R15	106/103Q	8PR	6.0J	703
	LT235/75R15	104/101Q	6PR	6.5J	733
	31×10.5R15LT	109Q	6PR	8.5J	775
	32×11.5R15LT	113Q	6PR	9.0J	801
	33×12.5R15LT	108Q	6PR	10.0J	826
16	LT225/75R16	115/112Q	10PR	6.0J	744
	LT235/70R16	110/107Q	8PR	7.0J	736
	LT235/85R16	120/116Q	10PR	6.5J	806
	LT245/70R16	113/110Q	8PR	7.0J	750
	LT245/75R16	120/116Q	10PR	7.0J	774
	LT265/75R16	123/120Q	10PR	7.5J	804
	LT285/75R16	122/119Q	8PR	8.0J	834
	LT265/65R17	120/117Q	10PR	8.0J	776
17	LT265/70R17	118/115Q	8PR	8.0J	804
	LT285/70R17	121/118Q	10PR	8.5J	832
	33×12.5R17LT	114Q	8PR	10.0J	826
18	35×12.5R17LT	121Q	10PR	10.0J	877
	33×12.5R18LT	118Q	10PR	10.0J	826
20	35×12.5R18LT	123Q	10PR	10.0J	877
	33×12.5R20LT	114Q	10PR	10.0J	826
	35×12.5R20LT	121Q	10PR	10.0J	877
22	37×13.5R20LT	127Q	10PR	11.0J	928
	33×12.5R22LT	109Q	10PR	10.0J	826
	35×12.5R22LT	117Q	10PR	10.0J	877
	37×13.5R22LT	123Q	10PR	11.0J	928

NS523

SPEED RATING
Q Speed Rated


ADDITIONAL INFORMATION

E9 CCC NOM P.O.R.

DRAINAGE BRAKING HANDLING

M+S



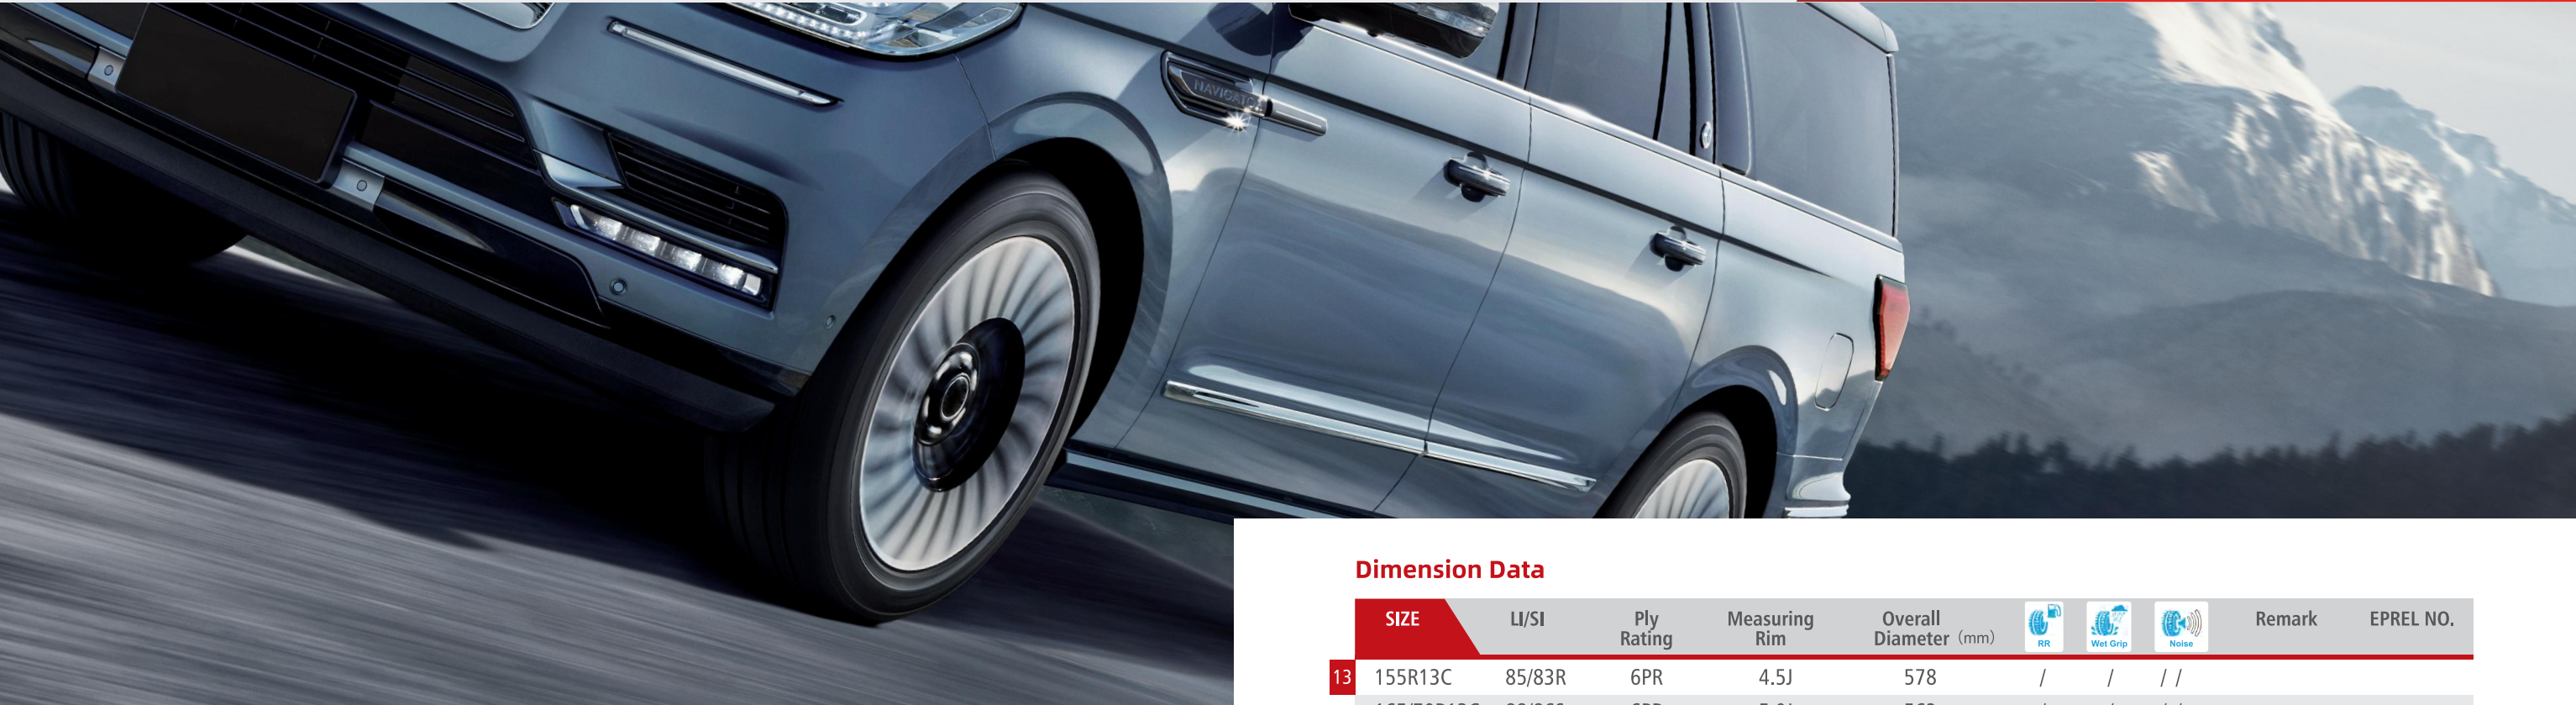


NS913



SPEED RATING
Q/R/S Speed Rated

ADDITIONAL INFORMATION



Dimension Data

	SIZE	LI/SI	Ply Rating	Measuring Rim	Overall Diameter (mm)	RR	Wet Grip	Noise	Remark	EPREL NO.
13	155R13C	85/83R	6PR	4.5J	578	/	/	//		
	165/70R13C	88/86S	6PR	5.0J	562	/	/	//		
	165R13C	91/89R	6PR	4.5J	596	/	/	//		
14	175/70R14C	95/93S	6PR	5.0J	602	/	/	//		
	175R14C	99/98Q	8PR	5.0J	634	D	B	B 71dB		627394
	185R14C	102/100R	8PR	5.5J	650	D	B	B 71dB		627408
	195R14C	106/104Q	8PR	5.5J	666	D	B	B 71dB		627420
	205/75R14C	109/107R	8PR	5.5J	664	D	B	B 71dB		627430
15	195/70R15C	104/102S	8PR	6.0J	655	D	B	B 71dB		627439
	195R15C	106/104R	8PR	5.5J	691	D	B	B 71dB		627553
	205/70R15C	106/104R	8PR	6.0J	669	D	B	B 71dB		627562
	205/75R15C	103/100R	8PR	5.5J	689	D	B	B 71dB		627572
	215/70R15C	109/107R	8PR	6.5J	683	D	B	B 71dB		627581
	225/70R15C	112/110R	8PR	6.5J	697	D	B	B 71dB		627594
	175/75R16C	101/99R	8PR	5.0J	668	D	B	B 71dB		627602
16	185/75R16C	104/102R	8PR	5.0J	684	D	B	B 71dB		627622
	195/75R16C	107/105R	8PR	5.5J	698	D	B	B 71dB		627633
	215/70R16C	108/106R	8PR	6.5J	709	D	B	B 72dB		627644
	215/75R16C	113/111R	8PR	6.0J	728	D	B	B 72dB		627649
	185R14C	102/100R	8PR	5.5J	650	D	B	B 71dB	RWW	627655
	195R14C	106/104Q	8PR	5.5J	666	D	B	B 71dB	RWW	627662
	205/75R14C	109/107R	8PR	5.5J	664	D	B	B 71dB	RWW	627670
RWW	195R15C	106/104R	8PR	5.5J	691	D	B	B 71dB	RWW	627678
	205/75R15C	103/100R	8PR	5.5J	689	D	B	B 71dB	RWW	627680

RWW= Raised White Wall



NS916



SPEED RATING

R/T Speed Rated

ADDITIONAL INFORMATION



NOISE



COMFORT



DRAINAGE



BRAKING



HANDLING

Dimension Data

	SIZE	LI/SI	Ply Rating	Measuring Rim	Overall Diameter (mm)	RR	Wet Grip	Noise	EPREL NO.
14	185R14C	102/100R	8PR	5.5J	652	D	B	B 72dB	624686
15	195/70R15C	104/102R	8PR	6.0J	655	D	B	B 72dB	624696
	205/65R15C	102/100T	6PR	6.0J	647	D	B	B 72dB	624697
	215/65R15C	104/102T	6PR	6.5J	661	D	B	B 72dB	624690
	225/70R15C	112/110R	8PR	6.5J	697	D	B	B 72dB	624693
16	195/60R16C	99/97T	6PR	6.0J	640	D	B	B 72dB	624700
	195/65R16C	104/102R	8PR	6.0J	660	D	B	B 72dB	624702
	205/65R16C	107/105R	8PR	6.0J	672	D	B	B 72dB	624704
	205/75R16C	110/108R	8PR	5.5J	714	D	B	B 72dB	624708
	205R16C	110/108Q	8PR	6.0J	640	D	B	B 72dB	624710
	215/60R16C	108/106T	8PR	6.5J	664	D	B	B 72dB	624713
	215/65R16C	109/107T	8PR	6.5J	686	D	B	B 72dB	624715
	215/75R16C	113/111R	8PR	6.0J	728	D	B	B 72dB	624718
	225/65R16C	112/110T	8PR	6.5J	698	D	B	B 72dB	627322
	235/65R16C	115/113R	8PR	7.0J	712	D	B	B 72dB	627374



NS805+



SPEED RATING

S/T/H/V Speed Rated

ADDITIONAL INFORMATION



E9



NOISE



COMFORT



DRAINAGE



BRAKING



HANDLING

M+S



Dimension Data

	SIZE	LI/SI	Measuring Rim	Overall Diameter (mm)				EPREL NO.
13	155/65R13	73T	4.5J	532	/	/	/ /	
	165/70R13	79T	5.0J	562	D	D	A 67dB	627698
14	175/65R14	82T	5.0J	584	D	D	A 67dB	627790
	175/70R14	84S	5.0J	602	D	D	A 67dB	627734
	185/60R14	82T	5.5J	578	D	D	A 67dB	627794
	195/60R14	86H	6.0J	590	D	D	A 67dB	627805
	185/65R14	86T	5.5J	596	D	D	A 67dB	627777
15	185/55R15	86H XL	6.0J	585	D	D	A 67dB	627858
	185/60R15	84H	5.5J	603	D	D	A 67dB	627879
	185/65R15	88T	5.5J	621	D	D	A 67dB	627813
	195/55R15	85V	6.0J	595	D	C	A 67dB	627890
	195/60R15	88T	6.0J	615	D	C	A 67dB	627841
	195/65R15	91H	6.0J	635	D	C	A 67dB	627907
	205/65R15	94H	6.0J	647	D	C	A 67dB	627912
	195/50R16	88H XL	6.0J	602	D	C	A 67dB	627951
	195/55R16	91H XL	6.0J	620	D	C	A 67dB	627968
	205/55R16	91H	6.5J	632	D	C	A 67dB	627983
16	205/60R16	92T	6.0J	652	D	C	A 67dB	627931
	215/55R16	97V XL	7.0J	642	D	C	A 67dB	627996
	215/60R16	95H	6.5J	664	D	C	A 67dB	628010
	225/55R16	99H XL	7.0J	654	D	C	A 67dB	628107
	215/50R17	95V XL	7.0J	648	D	C	A 67dB	628143
	215/55R17	98V XL	7.0J	668	D	C	A 67dB	628156
	225/45R17	94V XL	7.5J	634	D	C	A 67dB	628166
	225/50R17	98V XL	7.0J	658	D	C	A 67dB	628177
	225/55R17	101V XL	7.0J	680	D	C	A 67dB	628188
	225/65R17	102T	6.5J	724	D	C	A 67dB	628127
17	235/45R17	97V XL	8.0J	644	D	C	A 67dB	628197
	235/55R17	103V XL	7.5J	690	D	C	A 67dB	628235
	245/45R17	99V XL	8.0J	652	D	C	A 67dB	628242
	225/45R18	95V XL	7.5J	659	D	C	A 67dB	628318
	235/45R18	98V XL	8.0J	669	D	C	A 67dB	628326
	245/45R18	100V XL	8.0J	677	D	C	A 67dB	628272
	245/50R18	104V XL	7.5J	703	D	C	A 67dB	628334
	255/40R18	99V XL	9.0J	661	D	C	A 70dB	628283
	255/45R18	103V XL	8.5J	687	D	C	A 70dB	628345
	275/45R18	107V XL	9.0J	705	D	C	A 70dB	628356
19	225/45R19	96V XL	7.5J	685	D	C	A 67dB	628367
	245/45R19	102V XL	8.0J	703	D	C	A 70dB	628384



SCLAW NS806

SPEED RATING
S/T Speed Rated

ADDITIONAL INFORMATION





NOISECOMFORTDRAINAGEBRAKINGHANDLING



M+S



Dimension Data

	SIZE	LI/SI	Measuring Rim	Overall Diameter (mm)				EPREL NO.
15	215/75R15	100S	6.0J	703	D	C	B 72dB	628402
	235/75R15	109TXL	6.5J	733	D	C	B 72dB	628404
16	215/65R16	98T	6.5J	686	D	C	B 72dB	628413
	215/70R16	100T	6.5J	708	D	C	B 72dB	628415
	235/60R16	100T	7.0J	688	D	C	B 72dB	628422
	235/70R16	106T	7.0J	736	D	C	B 72dB	628432
17	225/65R17	102T	6.5J	724	D	C	B 72dB	628440
	215/60R17	96T	6.5J	690	D	C	B 72dB	628444
	225/60R17	99T	6.5J	702	D	C	B 72dB	629836
	235/65R17	104T	7.0J	738	D	C	B 72dB	629847
	265/65R17	112T	8.0J	776	D	C	B 73dB	629851
	245/60R18	105T	7.0J	751	D	C	B 72dB	629858
18	255/55R18	109T XL	8.0J	737	D	C	B 73dB	629862
	215/55R18	95T	7.0J	693	D	C	B 72dB	629866
	225/55R18	98T	7.0J	705	D	C	B 72dB	629879
	235/50R18	97T	7.5J	693	D	C	B 72dB	629886
	235/55R18	100T	7.5J	715	D	C	B 72dB	629892
	235/60R18	107TXL	7.0J	739	D	C	B 72dB	629903
	225/55R19	99T	7.0J	731	D	C	B 72dB	629960
19	235/50R19	103T XL	7.5J	719	D	C	B 72dB	629967
	235/55R19	105T XL	7.5J	741	D	C	B 72dB	629975
	245/55R19	103T	7.5J	753	D	C	B 72dB	629979
	255/45R19	104T XL	8.5J	713	D	C	B 73dB	629983
	255/50R19	107T XL	8.0J	739	D	C	B 73dB	629990
	245/45R20	103T XL	8.0J	728	D	C	B 72dB	
20	255/45R20	105T XL	8.5J	738	D	C	B 73dB	630002
	255/55R20	110T XL	8.0J	788	D	C	B 73dB	630006
	275/45R20	110T XL	9.0J	756	/	/	//	
	275/50R20	113T XL	8.5J	784	/	/	//	

SNOW

Designed specifically for **winter road conditions**. The use of advanced new silica compound, 3D kerfs and asymmetrical pattern offer increased winter tire performance; suitable for luxury premium and sports sedans.

NEREUS



SCLAW NS808




SPEED RATING
H/V Speed Rated

ADDITIONAL INFORMATION



M+S

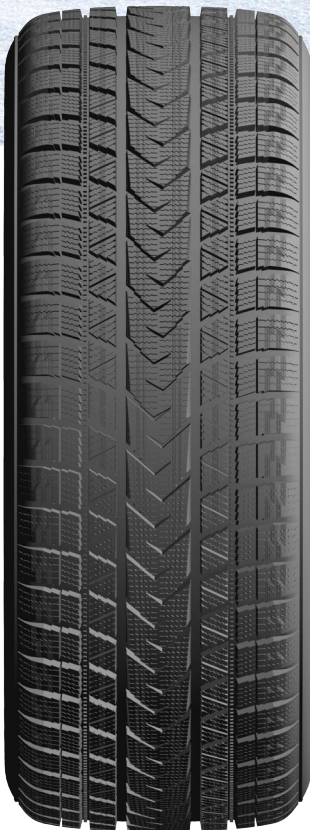

Dimension Data

	SIZE	LI/SI	Measuring Rim	Overall Diameter (mm)				EPREL NO.
16	215/65R16	98H	6.5J	686	C	D	A 68dB	741480
	225/60R16	102HXL	6.5J	676	C	D	A 68dB	744253
17	215/45R17	91VXL	7.0J	626	C	D	A 68dB	744333
	225/60R17	99H	6.5J	702	C	D	A 68dB	741611
18	235/65R17	104H	7.0J	738	C	D	A 68dB	744254
	225/40R18	92VXL	8.0J	637	C	D	A 68dB	741591
19	245/40R18	97VXL	8.5J	653	C	D	A 68dB	741634
	235/40R19	96VXL	8.5J	671	C	D	A 68dB	744255
20	245/40R19	98VXL	8.5J	679	C	D	A 68dB	744257
	255/35R19	96VXL	9.0J	661	C	D	A 68dB	744346
20	255/45R19	104VXL	8.5J	713	C	D	A 68dB	741665
	255/50R19	107VXL	8.0J	739	C	D	A 68dB	744273
20	245/40R20	99VXL	8.5J	704	C	D	A 68dB	744301



SCLAW

NS809

SPEED RATING

R/T Speed Rated

ADDITIONAL INFORMATION

NOISE

COMFORT

DRAINAGE

BRAKING

HANDLING

M+S



Dimension Data

	SIZE	LI/SI	Ply Rating	Measuring Rim	Overall Diameter (mm)				EPREL NO.
15	195/70R15C	104/ 102R	8PR	6.0J	655	C	B	A68dB	744503
	205/70R15C	106/104R	8PR	6.0J	669	C	B	A68dB	744850
	215/65R15C	104/102R	6PR	6.5J	661	C	B	A68dB	744731
	215/70R15C	109/107R	8PR	6.5J	683	C	B	A68dB	744538
	225/70R15C	112/110R	8PR	6.5J	697	C	B	A68dB	744561
16	185/75R16C	104/102R	8PR	5.0J	684	C	B	A68dB	744828
	195/65R16C	104/102T	8PR	6.0J	660	C	B	A68dB	744577
	195/75R16C	107/105R	8PR	5.5J	698	C	B	A68dB	744671
	205/65R16C	107/105T	8PR	6.0J	672	C	B	A68dB	744720
	215/60R16C	108/106R	8PR	6.5J	664	C	B	A68dB	744888
	215/65R16C	109/107T	8PR	6.5J	686	C	B	A68dB	744750
	215/75R16C	113/111R	8PR	6.0J	728	C	B	A68dB	744804
	225/65R16C	112/110R	8PR	6.5J	698	C	B	A68dB	744781
	225/75R16C	121/120R	10PR	6.0J	744	C	B	A68dB	744965
	235/65R16C	115/113R	8PR	7.0J	712	C	B	A68dB	744707
17	215/60R17C	109/107T	8PR	6.5J	690	C	B	A68dB	744943

OWL=Outline White Letter



N-101S

Dimension Data

SIZE	LI/SI	PATTERN CODE
ST175/80R13	91/87L 6PR	N-101S
ST205/75R14	100/96L 6PR	N-101S
ST215/75R14	102/98L 6PR	N-101S
ST205/75R15	107/102L 8PR	N-101S
ST225/75R15	117/112L 10PR	N-101S
ST235/80R16	124/120L 10PR	N-101S
ST235/85R16	125/121L 1-PR	N-101S



NSV53



NSV55

Dimension Data

SIZE	LI/SI	PATTERN CODE
5.00R12LT	88/86P 10PR	NS V53
5.00R12LT	88/86P 10PR	NS V55
5.50R12LT	97/95P 12PR	NS V53
5.50R13LT	97/95P 12PR	NS V55



Definitions

- Overall Diameter
- Tread Width
- Rim Width
- Section Height
- Section Width

Diameter of the tire from tread surface to tread surface while inflated but unladen.

The width of the tread surface,designed for contact with the road.

Distance between the inside of the rim flanges.

Distance from the bead seat to the outer tread surface of the inflated tire.

Distance between the outer sidewalls of an inflated tire.

Uniform Tire Quality Grading.

Speed Symbol

Speed Symbol		Speed(km/h)	Speed(mp/h)
K		110	68
L		120	74
M		130	81
N		140	87
P		150	93
Q		160	99
R		170	106
S		180	112
T		190	118
U		200	124
H		210	130
V		240	149
	W	270	
ZR	Y	300	186
	(Y)	Above 300	Above 186

Speed Symbol

BSW : Black Sidewall

WSW : White Sidewall

Load Index and Equivalent Loads

Load Index	Load(kg)	Load(lbs)
75	387	853
76	400	882
77	412	908
78	425	937
79	437	963
80	450	992
81	462	1019
82	475	1047
83	487	1074
84	500	1102
85	515	1135
86	530	1168
87	545	1201
88	560	1235

Load Index	Load(kg)	Load(lbs)
89	580	1279
90	600	1323
91	615	1356
92	630	1389
93	650	1433
94	670	1477
95	690	1521
96	710	1585
97	730	1609
98	750	1653
99	775	1709
100	800	1764
101	825	1819
102	850	1874

Load Index	Load(kg)	Load(lbs)
103	875	1929
104	900	1984
105	925	2039
106	950	2094
107	975	2149
108	1000	2205
109	1030	2271
110	1050	2337
111	1090	2403
112	1120	2469
113	1150	2535
114	1180	2601
115	1215	2679